

Physico-chemical study of water quality of Murna river in Shahdol city Madhya Pradesh, India

Sadique Khan

Lecturer in Chemistry Department, Govt. Polytechnic College, Shahdol, Madhya Pradesh, India

Abstract

Water is a scarce and valuable resource for the survival of mankind. Man-made activities change the morphology of the areas the river regimes causing problems of water pollution. Fast industrialization for sustainable development is causing major concern to the pollution of surface water because most of the industries are disposing off their waste directly to the nearby stream without making any treatment and violating the provisions for standard laid out for the same. Through the bodies like state pollution control board try to tackle the problem of pollution but the net result indicate that the pollution is increasing due to enormous population growth as such the available water in various surface sources must be preserved. The River water, at downstream, used for growing vegetables by the Farmers, posses the risk of contaminating food chain. The present study was that the water parameters which were taken for the present study are above the pollution level for surface water which does not satisfy their requirement for the use of various purposes. A brief attempt has been made to study the extent of change in the quality of water in comparison to water quality standards of World Health Organisation (WHO) [12].

Keywords: water pollution, pH, dissolved oxygen, alkalinity, hardness

Introduction

India has various land forms and rivers. There are 14 major rivers in India. Water, the universal solvent because of high dielectric constant has the property of dissolving most of the substances but the access of these substances leads to water pollution (Gautam, 1990) [1]. The water bodies get polluted due to the discharge of effluents from the industries, domestic activities, and soil pollution from the nearby dumping sites and agricultural drainage. These factors results in the deterioration of water quality of the various water bodies (Ambusht, 1990) [2]. Singh and Rai, 2003 [3] studied that the impact of the industrial effluents and domestic sewage on river Ganga at Allahabad and reported that all the pollution parameters are beyond the permissible limits and unfit for human consumption. Tiwari, 2004 [4] studied the pollution potential of river Pandu contaminated heavily by the discharge of various industries. Untreated sewage discharge not only damage for aquatic life but also hazardous to human health used for drinking purpose in the downstream areas of the river (Morisava, 1985) [5].

Water is life. No life can exist without water. Water is absolutely essential not only for survival of human beings, but also for animals, plants and all other living beings. It has many beneficial uses such as drinking, irrigation, navigation, propagation of wild life, fisheries, recreation; aesthetics etc. water is one of the most valuable natural resources. It is the basic element of social and economic infrastructure and is essential for healthy society and sustainable development. Water, the matrix of life is exposed to pollution, unhealthy environment, resulting in human affliction and diseases transmission due to rapid industrialization and population (Simpf, *et al.* 2011) [13].

Water is scarce and valuable resource and it is highly essential

for the survival of mankind. Man made activities are changing the morphology of the area of the river regimes and causing problem of pollution of water. Most of the cities and towns have developed along the banks of rivers because of the multipurpose-use of river water. But unfortunately some rivers are being polluted by indiscriminate disposal of sewage and industrial wastes (Trivedy and Goel, 1986) [6]. The present study is an attempt to make an assessment of the change in the physico-chemical properties of Murna River of Shahdol city.

Material and Methods

Study Area

District Shahdol lies between 23°15' N latitude to 24° N Latitude and 81°E longitude to 81°45' Longitude. The xpanse of the district is 110 km N-S and 30 km E-W thus comparising an area of about 5642 sq. km. which is 1.83% of the total area of the M.P. Shahdol lies on Katni-Bilaspur railway line and is approachable by road from Jabalpur, Rewa, Bilaspur, Mandla, Sidhi and Korla district (C.G.). The roads are motorable in all weather. District Shahdol lies in the heart of the country. The district is surrounded by Sone river and Satna and Sidhi district in north, Dindauri in South, Korla (Sarguja), Anuppur in east and Jabalpur and Umaria in the West. It is situated 489 mts. above the sea surface.

According to the 2011 census Shahdol District has a population of 1,064,989, roughly equal to the nation of Cyprus or the US state of Rhode Island. This gives it a ranking of 427th in India (out of a total of 640). The district has a population density of 172 inhabitants per square kilometre (450/sq mi). Its population growth rate over the decade 2001-2011 was 17.27%. Shahdol has a sex ratio of 968 females for every 1000 males, and a literacy rate of 68.36% [7].

In Shahdol town, eastern Madhya Pradesh state, central India.

It lies along the Murna River (a tributary of the Son River) about 110 miles (177 km) northwest of Bilaspur. Murna river flows from south to north-east. Murna river also provides the necessary water requirements for few villages of Shahdol city. During the survey it was found that forest cover in the bank of Murna river has almost nonexistent. In addition to there was a large and small slum encroachments along the bank of the river. This encroachment of bank of the river has a resulted into a drastic situation where the river Munra (now becomes as a drainage) has slowly dried up.

Climate

It is Hot in summer. Shahdol District summer highest day temperature is in between 29°C to 45°C. Average temperatures

of January is 16 °C, February is 21°C, March is 26°C, April is 32°C, May is 36°C .

Collection of Samples

The water samples were collected from surface near the margins of the small river between 9a.m. to 11.30a.m. in one litre glass bottles at each selected site. After addition of appropriate preservatives like magnesium sulphate, alkyl iodide and sulphuric acid at the sampling sites, the collected water samples were transfer red immediately to water testing laboratory, for analysis of various physicochemical parameters. The brief details of sampling site are presented in the Table 1.

Table 1: Brief Detail of Sampling Sites

S. No.	Site code	Sites	Description
1.	Site I	Near to Kalyanpur	Where the river Murna enters the city
2.	Site II	Near to MPEB colony	Located in the middle of the course of the River Murna through the city.
3.	Site III	Near to Sohagpur	Where the River Murna just leaves the city

Methodology

Analysis was carried out for various water quality parameters such as pH, Electrical conductivity (EC), Total dissolved solids (TDS), Total suspended solids (TSS), Total hardness (TH), Alkalinity, Chloride, and Dissolved oxygen (DO) using standard method as mentioned in APHA, 1985 [8]. The reagents used for the analysis were AR grade and double distilled water was used for preparation of solution.

Result and Discussions

The results of the physico-chemical analysis of different sampling sites are presented in Table 2.

pH of River Murna ranged from a minimum of 5.6 to 6.2, 6.1 to 6.4 and 5.4 to 5.8 at site I, II, and site III respectively. The obtained results indicate that the water of River Murna at all the sites is slightly acidic which can be attributed to the regular discharge of domestic sewage in the river and disposal of automobile /workshops waste.

Table 2: Physico-chemical Characteristics of Water Samples of Murna River, Shahdol

S. No.	Parameters	WHO Standard, 1984	Site I	Site II	Site III
1.	pH	7.0-8.5	5.6-6.2	6.1-6.4	5.4-5.8
2.	EC (micros/cm)	0.300	0.880-0.982	0.671-0.731	0.784-0.821
3.	TDS (mg/l)	500	665-684	467-492	560-587
4.	TSS (mg/l)	-	167-185	134-155	151-172
5.	Total hardness (mg/l)	100	216-245	197-217	186-231
6.	Alkalinity (mg/l)	100	410-434	240-257	315-330
7.	Chloride (mg/l)	200	340-342	260-274	286-295
8.	Dissolved oxygen (mg/l)	5.0	3.3-3.4	3.2-3.7	3.5-3.9

Electrical conductivity (EC) is a measure of capacity of solution to carry an electrical current. It is parameter for dissolved as well as dissociated substances and indicates the concentration of dissolved electrolytes. The permissible value of EC for drinking water is 300 micromhos/cm (Sreenivas *et al.*, 2006) [9]. EC were maximum at site I and the minimum were recorded at site II. In the present study, (sampling site I and site III) which are loaded with waste water and domestic sewage from several houses showed maximum levels of conductance in the water.

Total dissolved solids (TDS) indicate the general trend of the water quality of the surface water bodies. In natural water, total dissolved solids are composed mainly of carbonates,

bicarbonates, chlorides, phosphates and nitrates of calcium, magnesium and other particles.

The effect of presence of total dissolved solids (TDS) in river water is the turbidity due to presence of silt content and organic matter. During the present study, minimum values of TDS were recorded at site II (467-492 mg/l) and maximum were at site I (665-684 mg/l).The water samples having high TDS value cannot be used as a drinking as well as construction purposes. The maximum values at site I may be due to the presence of several types of suspended particles, manmade religious activities, run-off from many bathing Ghats, dumping of solid wastes.


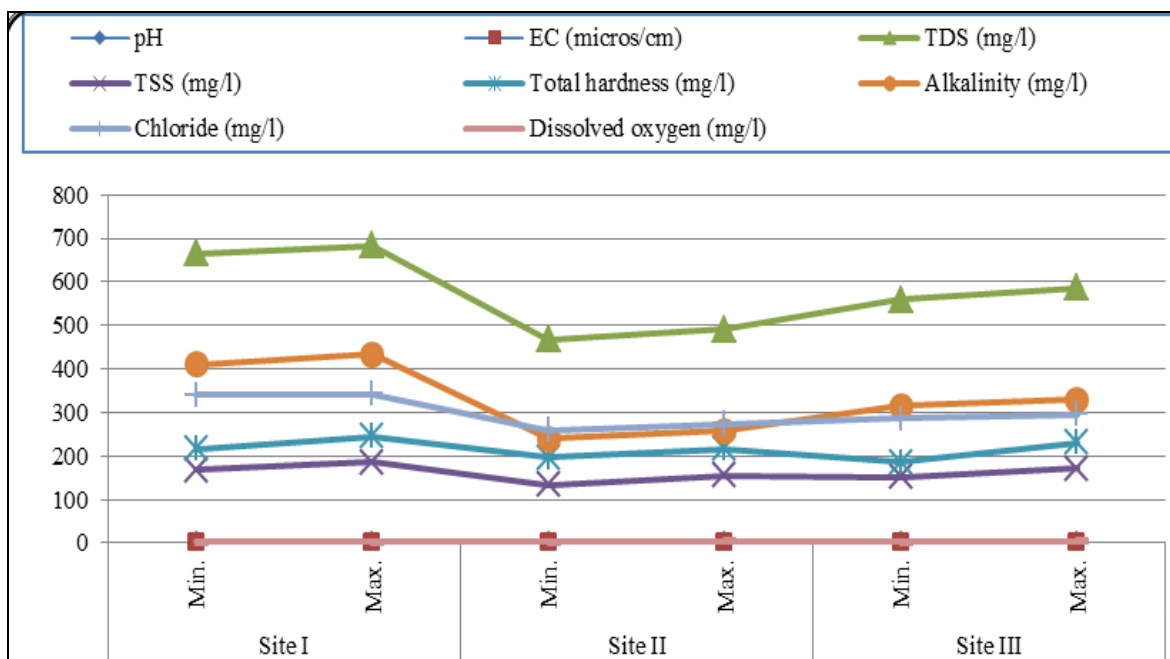


Fig 1: Graphic analysis of Physico-chemical Characteristics of Water Samples of Murna River, Shahdol

Total suspended solids (TSS) the higher concentration of total suspended solid in river is an index that it is more polluted. In the present study, the values of site I, II and III were in the range of 167-185 mg/l, 240-257 mg/l and 315-330 mg/l respectively.

Total hardness mainly depends upon the dissolved salts present in water. The water is classified as very hard if the values exceed 180 mg/l, therefore water of the river can be considered as hard. Hard water also forms deposits that clog plumbing. These deposits, called "scale", are composed mainly of calcium carbonate (CaCO_3), magnesium hydroxide $\text{Mg}(\text{OH})_2$ and calcium sulphate (CaSO_4). The following equilibrium reaction describes the dissolving/formation of calcium carbonate scales:



As water moves through soil and rock, it dissolves very small amounts of minerals and holds them in solution. Calcium and magnesium dissolved in water are the two most common minerals that make water "hard." Calcium and magnesium ions can be removed by water softeners. In the present study, it has been found that total hardness ranges from 216-245 mg/l at site I, 197-217 mg/l at site II and 186-231 mg/l at site III respectively. This is due to discharge of domestic sewage, washing clothes, animals in the river. Alkalinity imparts a bitter taste and sour taste to water bodies. Alkalinity depends on pH, CO_2 and chloride. The high value of alkalinity indicates the presence of weak and strong base such as carbonates, bicarbonates and hydroxides in the water body (Absi *et al.*, 1999; Jain *et al.*, 1997) ^[10-11]. In the present study, the values of site I, II and III were in the range of 410-434 mg/l, 240-257 mg/l and 315-330 mg/l respectively. This may be due to dry season with concentration of salts, high carbonate content and discharge of domestic sewage in the river. The high alkalinity in the study area is also due to the presence of high carbonate content in the water samples.

Chloride (Cl^-) is one of the major anions found in water and are generally combined with calcium, magnesium, or sodium. The maximum chloride contents were recorded at site I (340-342 mg/l) and minimum at site II (260-274 mg/l). This may be due to contaminated with local sewage, local drains and domestic effluents.

Dissolved oxygen (DO) is an important water quality parameter for various purposes. DO levels in surface water body indicate the ability to support aquatic life. In the present study, DO vary from 3.3- 3.4 mg/l at site I, 3.2-3.7mg/l at site II and 3.5 -3.9 mg/l at site III. The amount of DO in water has been reported not constant but fluctuates, depending on the local temperature and depth of the water bodies. The decrease in DO at site I may be attributed to absence of little turbulence in the river water and dumping of effluents along with urban garbage.

Conclusion

The study reveals that the water of the river Murna is deteriorated very badly as a result of addition of urban waste, domestic sewage, which enters the river from both the banks during its course through the heart of Shahdol city. Direct discharge of human and animal waste not only imparts the quality of water but also affects the health of the people down stream of Shahdol city where the same water is used for washing, bathing and sometimes for drinking purposes. The urban runoff and continuous dumping of waste materials especially sanitary waste are affecting the water quality of river Murna. There is considerable need for better understanding of these small rivers so that they can be managed effectively.

Acknowledgements

Authors would like to thank to the Principal of the Polytechnic College Shahdol for providing the laboratory facility for analytical works.

References

1. Gautama AC, Ecology, Pollution of Mountain Water, Ashish Publishing House, New-Delhi, 1990; 4.
2. Ambusht RS. Environmental Pollution: An Ecological Approach, Varnasi, 1990.
3. Singh SK, Rai JPN. Pollution Studies on River Ganga in Allahabad, Pollution Research, 2003; 22:469-472.
4. Tiwari D. Pollution Potential of the Wastes Polluting River Pandu, Nature, Environmental Pollution Technology, 2004; 3:219-221.
5. Morisawa MC. River Forms and Processes, Longman Publishers, New York, 1995; 64.
6. Trivedi RK, Goel PK. Chemical and Biological Methods for Water Pollution Studies, Environment Publications, 1986.
7. District Census, 2011.
8. APHA, Standard Methods for Examination of Water and waster water. 16th American Public Health Association, Washington, DC. 1985.
9. Sreenivas BS, Ramana VV, Ramesh K, Charya MA. Impact of Industrial Effluents and Sewage on the Water quality of River Godavari at Bhadrachalam Temple Town in South India, 2006; 12(3):543-552.
10. Abassi SA, Khan FJ, Sentilevelan K, Shabuden A. Indian Journal Environmental Health, 1999; 41(3):176-183.
11. Jain CK, Bhatia KKS, Vijay T, Ground Water Quality in Coastal Region of Andhra Pradesh, Indian J. Env. Health, 1997; 39(3):182.
12. WHO. Guidelines for Drinking Water Quality. 1984, 1.
13. Simpi B, Hiremath SM, Murthy KNS, Chandrashekarappa KN, Patel AN, Puttiah ET. Analysis of Water Quality Using Physico-Chemical Parameters Hosahalli Tank in Shimoga District, Karnataka, India, Global Journals Inc., USA. 2011, (3).